



Test Report: XLG-25

25W Constant Current LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

Environment Test


DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	22V-54V	I/P: 230VAC O/P: LED MODE Ta: 25°C	15.5V-55.4V
2	OUTPUT CURRENT ADJUST RANGE	0.25-1.05A	I/P: 230VAC O/P: SETTING Ta: 25°C	0.203 A- 1.119 A
3	CURRENT RIPPLE	5.0% max.@rated current	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	2.78%
4	OPEN CIRCUIT VOLTAGE (max)	57V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	55.9V
5	SET UP TIME	500ms/230VAC 500ms/115VAC	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	190ms/230VAC 170ms/115VAC


INPUT=230VAC/50HZ @ FULL LOAD

CH1: Output Voltage CH2: AC Input Voltage


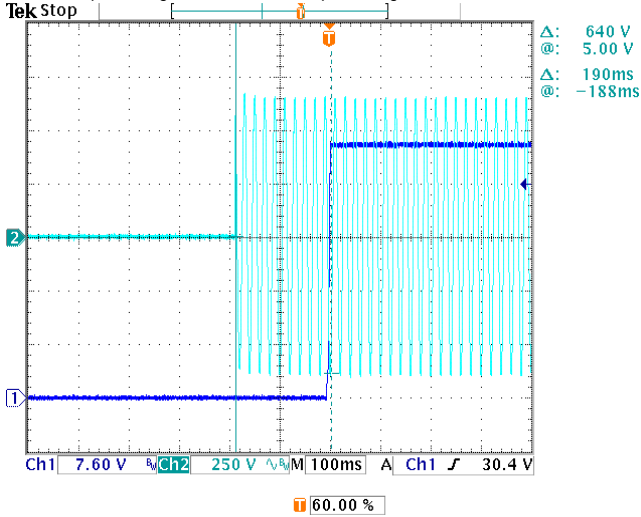


INPUT=115VAC/60HZ @ 75% LOAD

CH1: Output Voltage CH2: AC Input Voltage

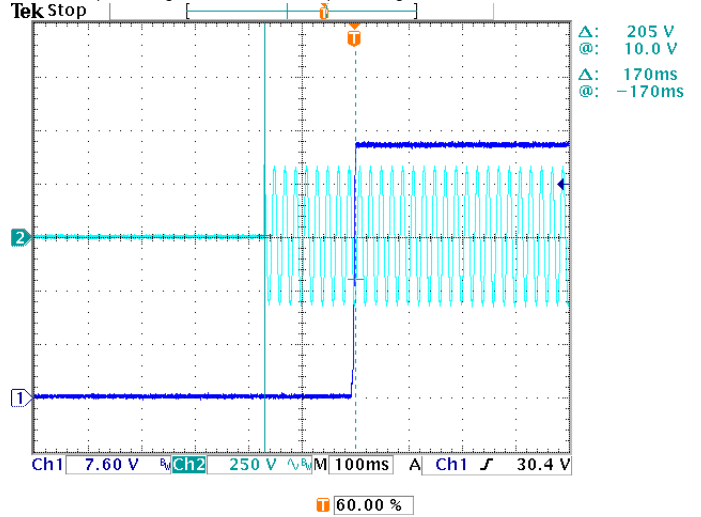

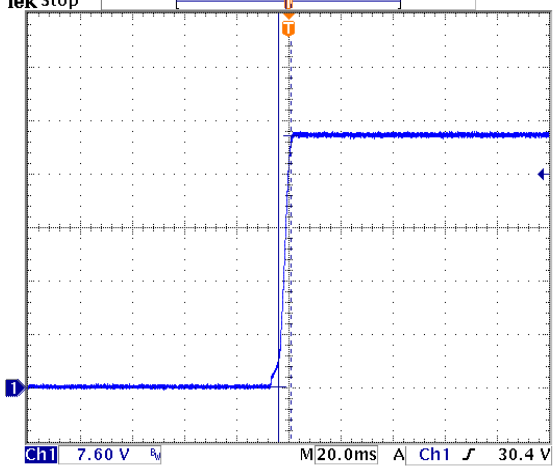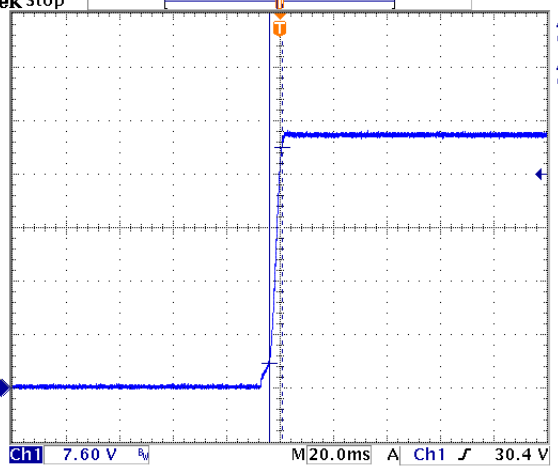



6	RISE TIME	100ms/230VAC 100ms/115VAC	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	4.8ms/230VAC 4.8ms/115VAC
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> <p>Tek Stop</p>  <p>Δ: 35.7 V @: 152mV Δ: 4.80ms @: -4.00ms</p> <p>Ch1 7.60 V 20.0ms A Ch1 30.4 V</p> <p>50.00 %</p>		<p>INPUT=115VAC/60HZ @ 75% LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> <p>Tek Stop</p>  <p>Δ: 30.7 V @: 3.50 V Δ: 4.80ms @: -4.00ms</p> <p>Ch1 7.60 V 20.0ms A Ch1 30.4 V</p> <p>50.00 %</p>		
7	CONSTANT POWER	O/P: 25W	I/P: 230 VAC O/P: $V_o \times I_o$	TEST: OK

8 DIMMING OPERATION



※ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10Vdc, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100uA(typ.)



◎ Applying additive 0 ~ 10VDC

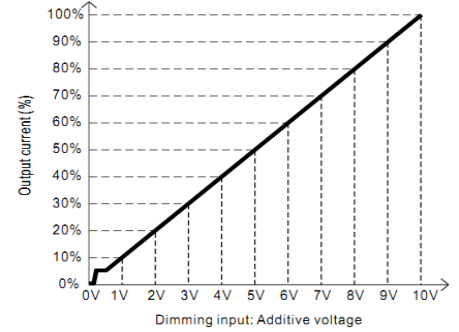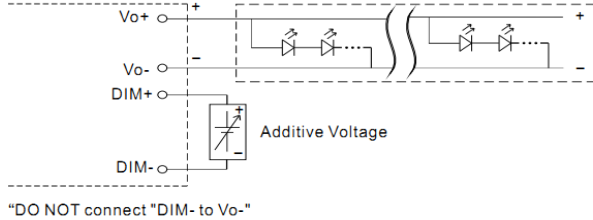

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

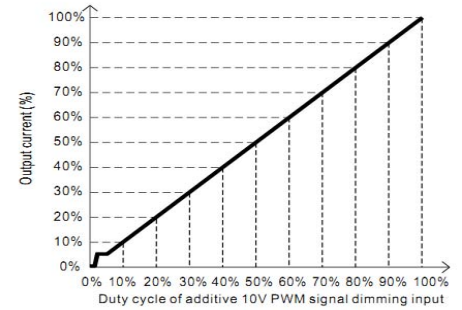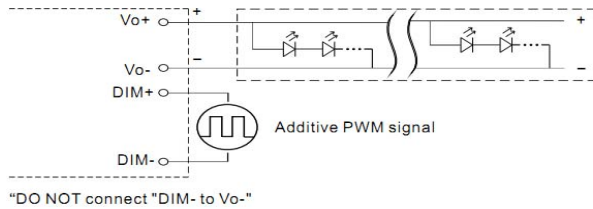

◎ Applying additive resistance:

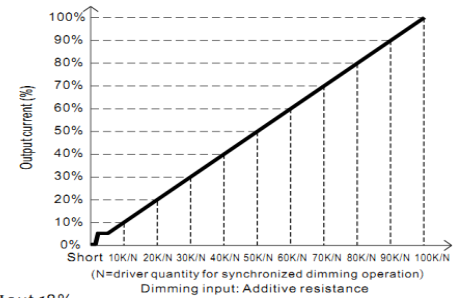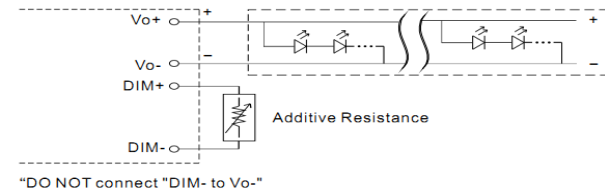

Note : 1. Min. dimming level is about 8% and the output current is not defined when $0\% < I_{out} < 8\%$.
 2. The output current could drop down to 0% when dimming input is about $0k\ \Omega$ or 0Vdc, or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC

O/P: DIMMING TEST

Ta: 25°C

	v	Short	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
1	Output Current	0	0.044	0.093	0.139	0.185	0.240	0.290	0.349	0.401	0.453	0.501	0.505
	%	0%	8.80%	18.60%	27.80%	37.00%	48.00%	58.00%	69.80%	80.20%	90.60%	100.20%	101.00%
2	PWM(100Hz)	0V	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
	Output Current	0	0.041	0.088	0.133	0.180	0.231	0.281	0.335	0.391	0.450	0.499	0.499
	%	0%	8.20%	17.6%	26.60%	36.00%	46.20%	56.20%	67.00%	78.20%	90.00%	99.80%	99.80%
3	R	0%	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
	Output Current	0	0.042	0.085	0.135	0.181	0.235	0.280	0.334	0.391	0.444	0.499	0.500
	%	0%	8.40%	17.00%	27.00%	36.20%	47.00%	56.00%	66.80%	78.20%	88.80%	99.80%	100.00%


TEST RESULT: OK

INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC-305VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	90V-305V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ -63 HZ NO DAMAGE	I/P: 90 VAC -305 VAC O/P: FULL-MIN LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	0.29A/115VAC 0.15A/230VAC 0.13A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I =0.254A/ 115VAC I =0.126A/ 230VAC I =0.108A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-CASE: 0.242 mA N-CASE: 0.242 mA
5	NO LOAD/STANDBY POWER CONSUMPTION	NO LOAD POWER CONSUMPTION <0.5W for A, <0.75W for I series STANDBY POWER CONSUMPTION <0.5W for AB	I/P: 230VAC O/P: NO LOAD/STANDBY Ta: 25°C	0.432W for A 0.587W for I 0.32W for AB
6	INRUSH CURRENT(Typ)	50A/230VAC Twidth =350 us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =20.2A/ 230VAC Twidth =280.4us

INPUT=230VAC/50HZ @ FULL LOAD

CH1: AC Input Voltage CH2: Input current

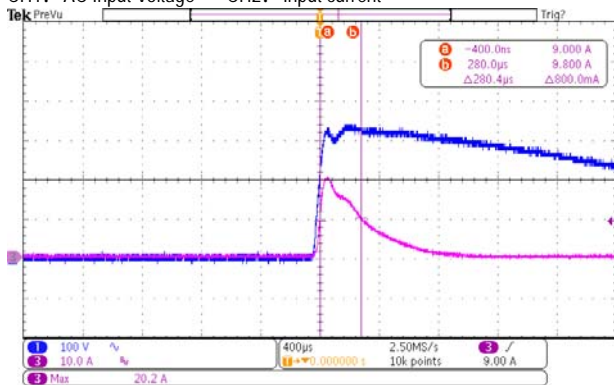

7	EFFICIENCY(Typ)	88%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	88.29%																																												
<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V (25W)</th> <th>230V (25W)</th> <th>115V (25W)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>58%</td><td>58%</td><td>58%</td></tr> <tr><td>20%</td><td>74%</td><td>73%</td><td>73%</td></tr> <tr><td>30%</td><td>80%</td><td>79%</td><td>79%</td></tr> <tr><td>40%</td><td>83%</td><td>82%</td><td>82%</td></tr> <tr><td>50%</td><td>85%</td><td>84%</td><td>84%</td></tr> <tr><td>60%</td><td>87%</td><td>86%</td><td>86%</td></tr> <tr><td>70%</td><td>87%</td><td>87%</td><td>87%</td></tr> <tr><td>80%</td><td>88%</td><td>88%</td><td>88%</td></tr> <tr><td>90%</td><td>88%</td><td>88%</td><td>88%</td></tr> <tr><td>100%</td><td>88%</td><td>88%</td><td>88%</td></tr> </tbody> </table>					LOAD (%)	277V (25W)	230V (25W)	115V (25W)	10%	58%	58%	58%	20%	74%	73%	73%	30%	80%	79%	79%	40%	83%	82%	82%	50%	85%	84%	84%	60%	87%	86%	86%	70%	87%	87%	87%	80%	88%	88%	88%	90%	88%	88%	88%	100%	88%	88%	88%
LOAD (%)	277V (25W)	230V (25W)	115V (25W)																																													
10%	58%	58%	58%																																													
20%	74%	73%	73%																																													
30%	80%	79%	79%																																													
40%	83%	82%	82%																																													
50%	85%	84%	84%																																													
60%	87%	86%	86%																																													
70%	87%	87%	87%																																													
80%	88%	88%	88%																																													
90%	88%	88%	88%																																													
100%	88%	88%	88%																																													
8	POWER FACTOR	0.92/277 VAC 0.95/230 VAC 0.97/115 VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.999 /115VAC PF=0.985 /230VAC PF=0.959 /277VAC																																												
<p>P.F vs LOAD</p> <p>Constant Current Mode</p> <table border="1"> <caption>P.F vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V (25W)</th> <th>230V (25W)</th> <th>115V (25W)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>0.45</td><td>0.60</td><td>0.95</td></tr> <tr><td>20%</td><td>0.63</td><td>0.80</td><td>0.97</td></tr> <tr><td>30%</td><td>0.75</td><td>0.90</td><td>0.98</td></tr> <tr><td>40%</td><td>0.84</td><td>0.94</td><td>0.99</td></tr> <tr><td>50%</td><td>0.88</td><td>0.96</td><td>0.99</td></tr> <tr><td>60%</td><td>0.91</td><td>0.97</td><td>0.99</td></tr> <tr><td>70%</td><td>0.93</td><td>0.98</td><td>0.99</td></tr> <tr><td>80%</td><td>0.95</td><td>0.98</td><td>0.99</td></tr> <tr><td>90%</td><td>0.96</td><td>0.99</td><td>0.99</td></tr> <tr><td>100%</td><td>0.96</td><td>0.99</td><td>0.99</td></tr> </tbody> </table>					LOAD (%)	277V (25W)	230V (25W)	115V (25W)	10%	0.45	0.60	0.95	20%	0.63	0.80	0.97	30%	0.75	0.90	0.98	40%	0.84	0.94	0.99	50%	0.88	0.96	0.99	60%	0.91	0.97	0.99	70%	0.93	0.98	0.99	80%	0.95	0.98	0.99	90%	0.96	0.99	0.99	100%	0.96	0.99	0.99
LOAD (%)	277V (25W)	230V (25W)	115V (25W)																																													
10%	0.45	0.60	0.95																																													
20%	0.63	0.80	0.97																																													
30%	0.75	0.90	0.98																																													
40%	0.84	0.94	0.99																																													
50%	0.88	0.96	0.99																																													
60%	0.91	0.97	0.99																																													
70%	0.93	0.98	0.99																																													
80%	0.95	0.98	0.99																																													
90%	0.96	0.99	0.99																																													
100%	0.96	0.99	0.99																																													
9	TOTAL HARMONIC DISTORTION	THD < 10% (@load ≥ 50%/115VAC, 230VAC; @load ≥ 75%/277VAC)	I/P: 115 VAC/50% LOAD I/P: 230 VAC/50% LOAD I/P: 277 VAC/75% LOAD Ta: 25°C	THD=3.14% @50% load /115VAC THD=5.82% @50% load /230VAC THD=6.43% @75% load /277VAC																																												

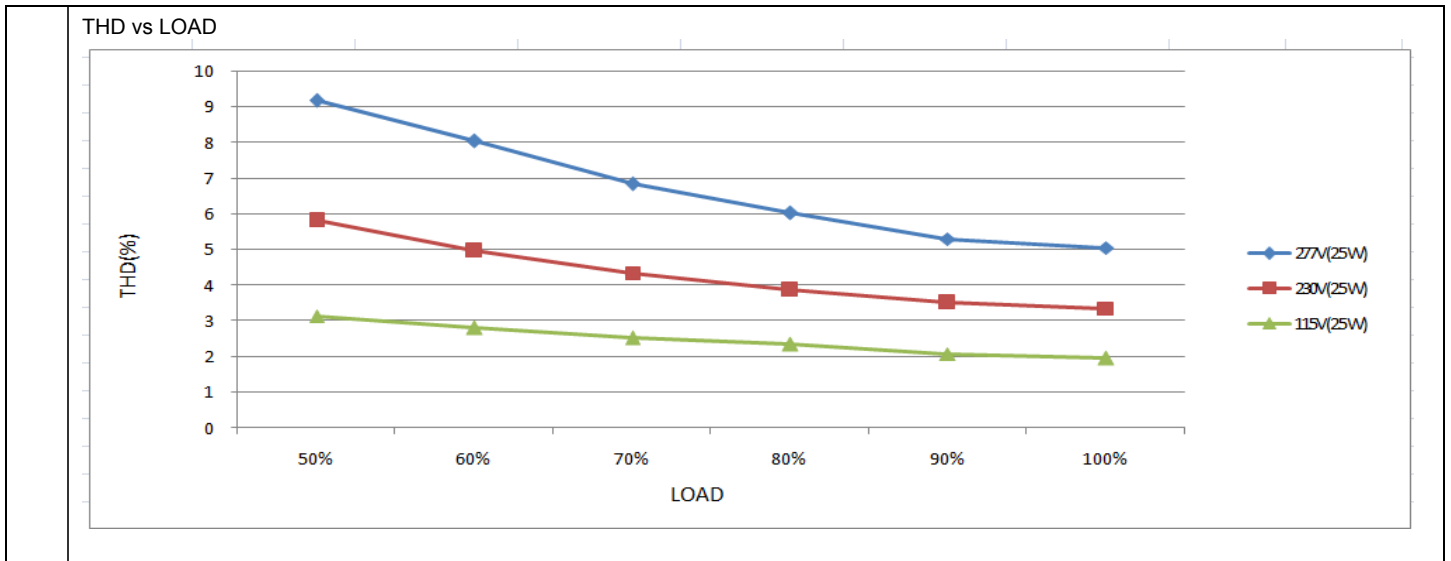

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 90VAC I/P: 305VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER POWER PROTECTION	110%-150%	I/P: 90VAC I/P: 230VAC I/P: 305VAC O/P: FULL LOAD Ta: 25°C	134.1%/ 305VAC 133.3%/ 230VAC 133.75%/ 90VAC PROTECTION TYPE: recovers automatically after fault condition is removed
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305 VAC I/P: 90 VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed
4	INPUT OVP (for XLG-25I only)	320 ~ 370VAC (Shut down output voltage when the input voltage exceeds protection voltage Can survive input voltage stress of 440Vac for 48 hours	I/P: TESTING O/P: FULL LOAD Ta:25°C	PASS

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor (D to S) or (C to E) Peak Voltage	Q 2 Rated 4.5A/800V	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1) 684 V (2) 500 V (3) 678 V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 12.8A/700V	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1) 468V (2) 460V (4)468 V

3	P.F.C DIODE	D4 Rated: 3A/600V	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1) 456V (2) 488V (3)464 V
4	Diode Peak Voltage	D100 Rated: 10A/200V	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1) 163 V (2) 133 V (3) 159 V
5	Input Capacitor	C5 Rated: 22u /500V	I/P: High-Line +3V =308 V O/P: (1) FULL LOAD input on/off (2) NO LOAD input on /Off (3) FULL LOAD /NO LOAD Change Ta: 25°C	(1) 476 V (2) 484 V (3) 484 V
6	Control IC	U1 Rated 27V (MAX.)	I/P: High-Line +3V =308 V O/P: (1) FULL LOAD (2) Output Short (3) O.P.P Ta: 25°C	(1)12.5 V (2)13.7 V (3)12.3 V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG: 2.0KVAC/min O/P-FG: 1.5KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min Ta: 25°C	I/P-O/P: 2.608 mA I/P-FG: 2.170 mA O/P-FG: 2.658 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG: 500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta: 25°C	I/P-O/P: >9999 MΩ I/P-FG: >9999 MΩ O/P-FG: >9999 MΩ
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	10mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ O/P: FULL /50% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab



4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 INDUSTRY L-N: 4KV L,N-PE: 6KV	I/P: 230VAC/50HZ O/P: FULL LOAD L-N: 4KV L,N-PE: 6KV Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results please refer to the latest EMC test report.			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																				
1	TEMPERATURE RISE TEST	MODEL: XLG-25-AB 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=24.8 °C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=62.7 °C																																																																																																						
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=24.8 °C</th> <th>HIGH AMBIENT Ta=62.7 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>ZR1</td><td>39.6 °C</td><td>76.6 °C</td></tr> <tr><td>2</td><td>RT1</td><td>43.2 °C</td><td>79.6 °C</td></tr> <tr><td>3</td><td>C1</td><td>42.6 °C</td><td>80.1 °C</td></tr> <tr><td>4</td><td>LF1</td><td>41.1 °C</td><td>78.6 °C</td></tr> <tr><td>5</td><td>BD1</td><td>41.7 °C</td><td>78.9 °C</td></tr> <tr><td>6</td><td>ZR2</td><td>40.0 °C</td><td>77.2 °C</td></tr> <tr><td>7</td><td>C8</td><td>42.0 °C</td><td>79.7 °C</td></tr> <tr><td>8</td><td>C2</td><td>41.3 °C</td><td>79.0 °C</td></tr> <tr><td>9</td><td>Q1</td><td>43.0 °C</td><td>80.4 °C</td></tr> <tr><td>10</td><td>Q2</td><td>57.1 °C</td><td>96.5 °C</td></tr> <tr><td>11</td><td>C5</td><td>44.3 °C</td><td>81.9 °C</td></tr> <tr><td>12</td><td>D3</td><td>40.2 °C</td><td>76.4 °C</td></tr> <tr><td>13</td><td>D6</td><td>48.3 °C</td><td>87.1 °C</td></tr> <tr><td>14</td><td>U1</td><td>41.3 °C</td><td>78.8 °C</td></tr> <tr><td>15</td><td>U2</td><td>42.9 °C</td><td>80.3 °C</td></tr> <tr><td>16</td><td>Q50</td><td>45.3 °C</td><td>83.2 °C</td></tr> <tr><td>17</td><td>C51</td><td>44.1 °C</td><td>81.7 °C</td></tr> <tr><td>18</td><td>T1</td><td>45.2 °C</td><td>82.6 °C</td></tr> <tr><td>19</td><td>D100</td><td>46.6 °C</td><td>81.6 °C</td></tr> <tr><td>20</td><td>C101</td><td>42.6 °C</td><td>79.1 °C</td></tr> <tr><td>21</td><td>C110</td><td>41.0 °C</td><td>77.6 °C</td></tr> <tr><td>22</td><td>U100</td><td>41.5 °C</td><td>78.4 °C</td></tr> <tr><td>23</td><td>RT2</td><td>41.8 °C</td><td>78.7 °C</td></tr> <tr><td>24</td><td>TC</td><td>39.1 °C</td><td>76.0 °C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=24.8 °C	HIGH AMBIENT Ta=62.7 °C	1	ZR1	39.6 °C	76.6 °C	2	RT1	43.2 °C	79.6 °C	3	C1	42.6 °C	80.1 °C	4	LF1	41.1 °C	78.6 °C	5	BD1	41.7 °C	78.9 °C	6	ZR2	40.0 °C	77.2 °C	7	C8	42.0 °C	79.7 °C	8	C2	41.3 °C	79.0 °C	9	Q1	43.0 °C	80.4 °C	10	Q2	57.1 °C	96.5 °C	11	C5	44.3 °C	81.9 °C	12	D3	40.2 °C	76.4 °C	13	D6	48.3 °C	87.1 °C	14	U1	41.3 °C	78.8 °C	15	U2	42.9 °C	80.3 °C	16	Q50	45.3 °C	83.2 °C	17	C51	44.1 °C	81.7 °C	18	T1	45.2 °C	82.6 °C	19	D100	46.6 °C	81.6 °C	20	C101	42.6 °C	79.1 °C	21	C110	41.0 °C	77.6 °C	22	U100	41.5 °C	78.4 °C	23	RT2	41.8 °C	78.7 °C	24	TC	39.1 °C	76.0 °C
NO	Position	ROOM AMBIENT Ta=24.8 °C	HIGH AMBIENT Ta=62.7 °C																																																																																																					
1	ZR1	39.6 °C	76.6 °C																																																																																																					
2	RT1	43.2 °C	79.6 °C																																																																																																					
3	C1	42.6 °C	80.1 °C																																																																																																					
4	LF1	41.1 °C	78.6 °C																																																																																																					
5	BD1	41.7 °C	78.9 °C																																																																																																					
6	ZR2	40.0 °C	77.2 °C																																																																																																					
7	C8	42.0 °C	79.7 °C																																																																																																					
8	C2	41.3 °C	79.0 °C																																																																																																					
9	Q1	43.0 °C	80.4 °C																																																																																																					
10	Q2	57.1 °C	96.5 °C																																																																																																					
11	C5	44.3 °C	81.9 °C																																																																																																					
12	D3	40.2 °C	76.4 °C																																																																																																					
13	D6	48.3 °C	87.1 °C																																																																																																					
14	U1	41.3 °C	78.8 °C																																																																																																					
15	U2	42.9 °C	80.3 °C																																																																																																					
16	Q50	45.3 °C	83.2 °C																																																																																																					
17	C51	44.1 °C	81.7 °C																																																																																																					
18	T1	45.2 °C	82.6 °C																																																																																																					
19	D100	46.6 °C	81.6 °C																																																																																																					
20	C101	42.6 °C	79.1 °C																																																																																																					
21	C110	41.0 °C	77.6 °C																																																																																																					
22	U100	41.5 °C	78.4 °C																																																																																																					
23	RT2	41.8 °C	78.7 °C																																																																																																					
24	TC	39.1 °C	76.0 °C																																																																																																					
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 305VAC/90VAC O/P: FULL LOAD Ta= -45°C / -30°C	TEST: OK																																																																																																				
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=60°C HUMIDITY= 95 %R.H	TEST: OK																																																																																																				
4	TEMPERATURE COEFFICIENT	±0.03 %/°C (0-60°C)	I/P: 230 VAC O/P: FULL LOAD	±0.0015 %/°C (0-60°C)																																																																																																				
5	STORAGE TEMPERATURE TEST	-40~+80°C	1. Thermal shock Temperature: -45°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 100 CYCLE 5. Input/Output condition: STATIC TEST: OK																																																																																																					



6	THERMAL SHOCK TEST	-40~+60°C	1. Thermal shock Temperature: -45°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16 CYCLE 5. Input/Output condition: 230VAC/ FULL LOAD AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST TEST: OK
7	VIBRATION TEST	10~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10-500Hz (3) Sweep Time: 12min/sweep cycle (4) Acceleration: 6G (5) Test Time: 72min in each axis (X.Y.Z) (6) Ta: 25°C TEST: OK
8	CAPACITOR LIFE CYCLE	XLG-25-AB: SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Tc= 70 °C LIFE TIME (2) I/P: 230VAC O/P: 75% LOAD Tc= 70 °C LIFE TIME (3) I/P: 230VAC O/P: 50% LOAD Tc= 70 °C LIFE TIME	(1) 134119 HRS (2) 134850 HRS (3) 144939 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 1305.62K hrs min. Telcordia SR-332 (Bellcore) 399.88K hrs min. MIL-HDBK-217F (25°C)	
10	Ongoing Reliability Test	I/P: 230VAC O/P: FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/ZHOUBIAO	WENFENG	LIUWY