

# MechaTronix *in* LED

– MOUNTING INSTRUCTION –

ModuLED Giga-HBG High Bay LED Cooler ø152mm with driver connection system



## Product Details

Model n°	 ModuLED Giga 152100-HBG	 ModuLED Giga 152150-HBG
Dimension (mm) <sup>*1</sup>	ø152 x h100	ø152 x h150
Volume (mm <sup>3</sup> )	566553	857898
Cooling Surface (mm <sup>2</sup> )	363547	541592
Weight (gr)	1530	2316
Thermal Resistance (°C/W) <sup>*2</sup>	0.52	0.46
Power Pd (W) <sup>*3</sup>	95	110
Heat Sink Material	AL6063-T5	AL6063-T5

<sup>\*1</sup> 3D files are available in ParaSolid, STP and IGS on request

<sup>\*2</sup> The thermal resistance Rth is determined with a calibrated heat source of 30mm x 30mm central placed on the heat sink, Tamb 40° and an open environment. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C  
The thermal resistance of a LED cooler is not a fix value and will vary with the applied dissipated power Pd

<sup>\*3</sup> Dissipated power Pd. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C  
The maximal dissipated power needs to be verified in function of required case temperature Tc or junction temperature Tj and related to the estimated ambient temperature where the light fixture will be placed  
Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module

To calculate the dissipated power please use the following formula:  $Pd = Pe \times (1 - \eta_L)$

Pd - Dissipated power

Pe - Electrical power

$\eta_L$  = Light efficiency of the LED module

### Notes:

- MechaTronix reserves the right to change products or specifications without prior notice.
- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MechaTronix.

# MechaTronix in LED

– MOUNTING INSTRUCTION –

ModulED Giga-HBG High Bay LED Cooler  $\phi$ 152mm with driver connection system



## Mounting Instruction



### GE Lighting LED Modules



GE Infusion™ is a game-changing technology and one of the most flexible LED lighting solutions on the market. As a designer, OEM or end-users, you can choose from an extensive selection of modules. Plus, there's the assurance of GE reliability and performance.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.

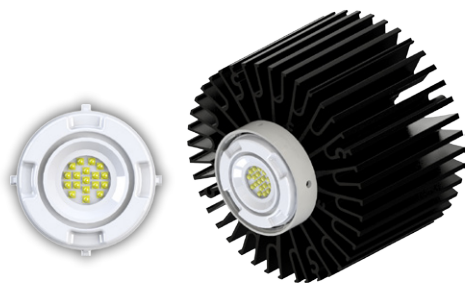


#### Infusion M-series Spot Light Modules

##### Model names

- Infusion M4500 series

##### Mounting

- Twist and lock LED engine
- Mounting with GE LED collar by 4 self tapping screws M4 x 6mm or 8mm
- Red indicator marks

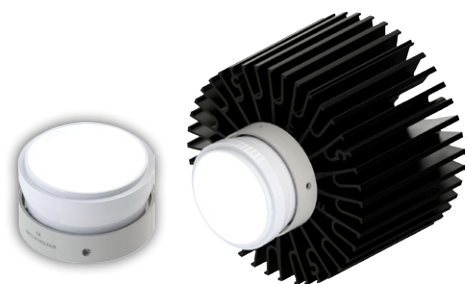


#### Infusion DLM-series Down Light Modules

##### Model names

- Infusion DLM4000 series

##### Mounting

- Twist and lock LED engine
- Mounting with GE LED collar by 4 self tapping screws M4 x 6mm or 8mm
- Red indicator marks

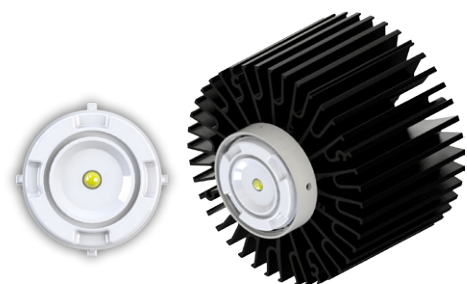

#### Infusion NPM-series Narrow Punch Modules

##### Model names

- MP30/827/W/N
- MP30/830/W/N
- MP30/930/W/N
- MP30/840/W/N

##### Mounting

- Twist and lock LED engine
- Mounting with GE LED collar by 4 self tapping screws M4 x 6mm or 8mm
- Red indicator marks